On startup, press delete until BIOS is entered. Navigate to Advanced -> Network Stack Configuration and Enable Network Stack. Also in this section – Disable IPv6 PXE Support.

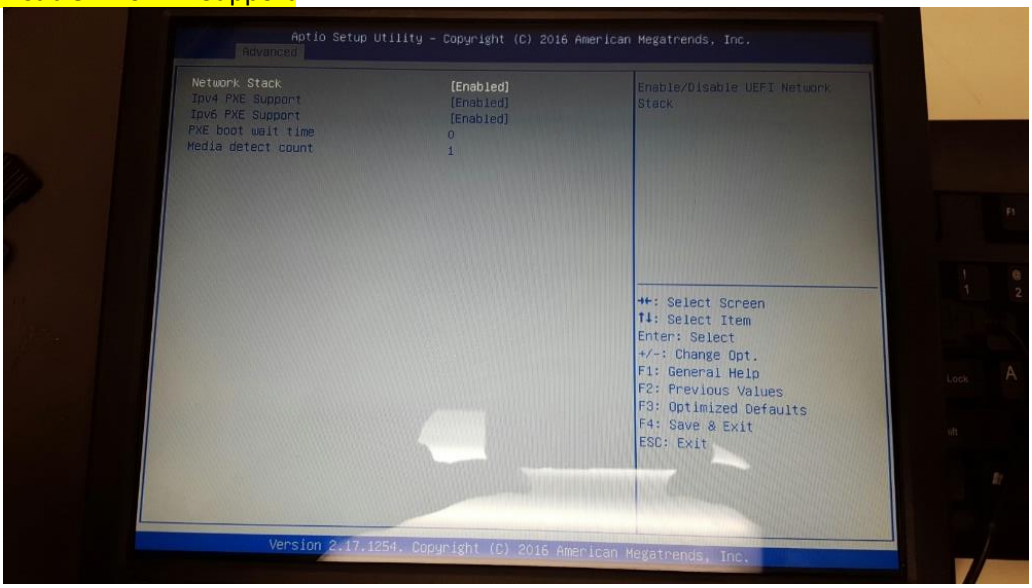

Press Esc and navigate to Advanced -> CSM Configuration and confirm it is setup as follows. Once this is done press F4 and save changes, then reboot and enter back into BIOS.

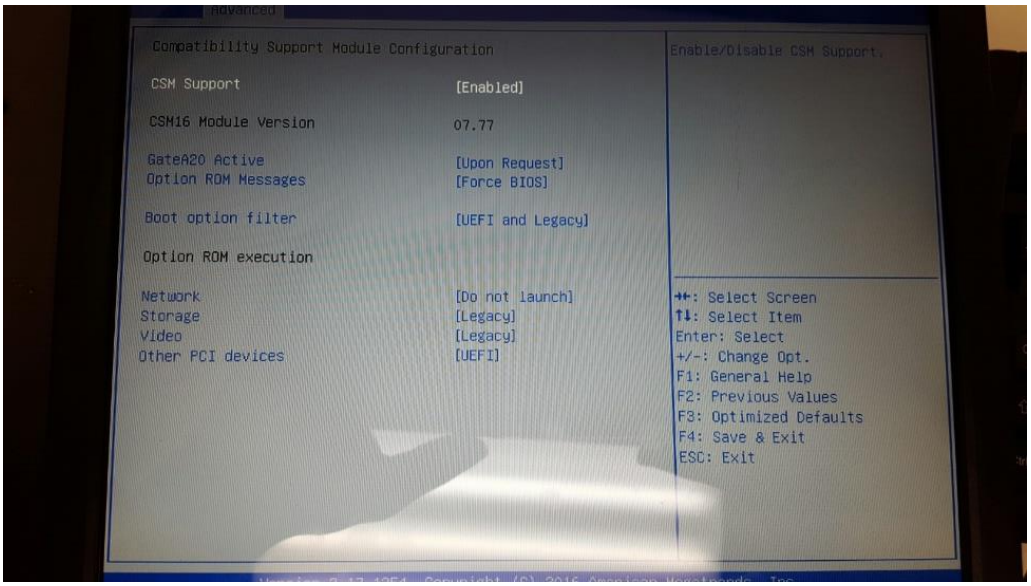
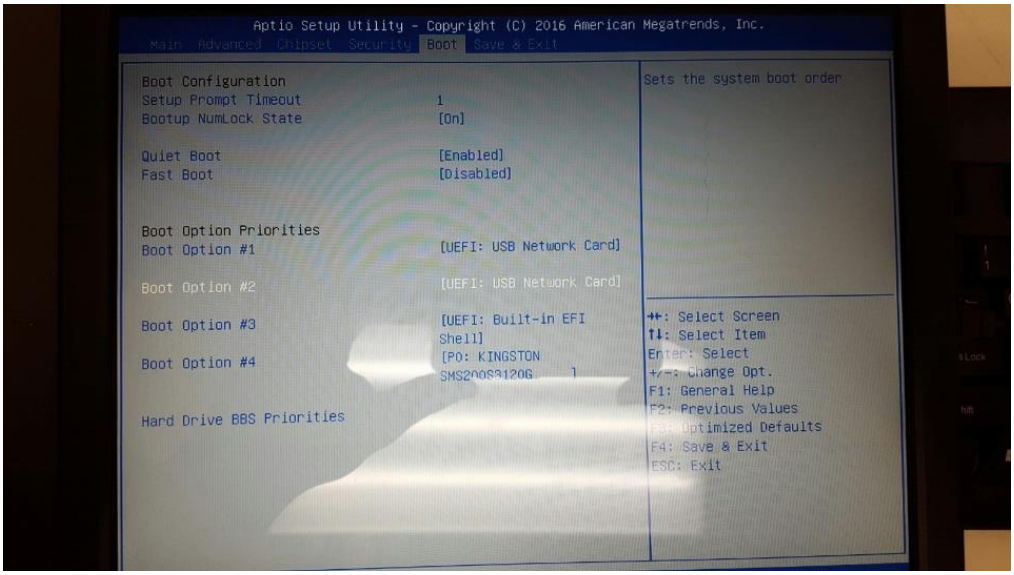
Navigate to Boot -> Boot Option Properties and set the first boot options to the USB Network Cards. Once complete press F4 to save changes and continue to boot. On boot, Media should show as present and the tablet should Start PXE over IPv4 to boot from the Network.